

1730 Mill Pack

Thermoset Fiber for Plant-Wide Use in Pumps and Rotating Equipment

Glaze-Resistant General Service Packing


Chesterton 1730 Mill Pack thermoset fiber packing provides outstanding heat resistance while maintaining excellent leakage control and reduced power consumption. Rugged, easy-to-use thermoset fiber packing controls leakage effectively while it is kind to shafts. 1730 Mill Pack provides high reliability in the most demanding applications. It is resistant to heat and will not glaze like common paper mill packings, even at high shaft speeds.

Technical Data


Pressure Limit	28 bar g (400 psig)
Shaft Speed	10 m/s (2000 fpm)
Temperature Limit	290°C (550°F)
Chemical Resistance	pH 1 – 13

Applications

For use in agitators, mixers, stock pumps, service water, white water, and intensifiers.

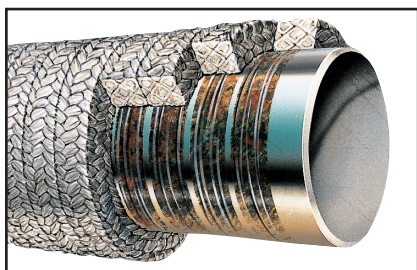

Problem: Standard packing often glazes and scores the shaft

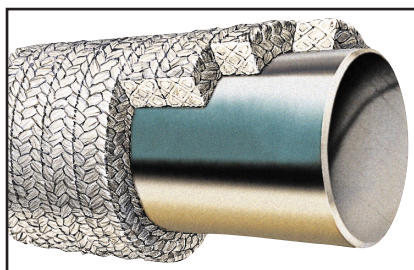

Solution: Chesterton 1730 Mill Pack is resistant to heat and abrasives, will not glaze, unlike common mill packings



- Easy and fast break-in
- Abrasion-resistant, while non-scoring
- Good chemical resistance
- Glaze-resistant
- User-friendly
- Soft, pliable, conforming
- Clean handling
- Plant-wide usage
- An excellent choice for packing on damaged shaft sleeves

Size		Packaged $\pm$ 10%		Item Number
mm	inch	kg	lbs	
6.0	–	0.908	2	000637
6.5	1/4	0.908	2	000638
		2.270	5	000691
8.0	5/16	0.908	2	000692
		2.270	5	000693
9.5	3/8	2.270	5	000694
		4.540	10	000695
10.0	–	0.908	2	000696
		2.270	5	000697
11.0	7/16	2.270	5	000698
12.0	–	0.908	2	000702
		2.270	5	000703
12.5	1/2	2.270	5	000704
		4.540	10	000705
14.0	9/16	2.270	5	000706
		4.540	10	000932
16.0	5/8	4.540	10	000933
17.5	11/16	4.540	10	000934
19.0	3/4	4.540	10	000935
20.5	13/16	4.540	10	001182
22.0	7/8	4.540	10	001183
25.5	1	4.540	10	001184

Chesterton ISO certificates available on
chesterton.com/corporate/iso

Distributed by:

Technical data reflects results of laboratory tests and is intended to indicate general characteristics only. A.W. Chesterton Company disclaims all warranties express or implied, including warranties of merchantability and fitness for a particular purpose. Liability, if any, is limited to product replacement only. Any images contained herein are for general illustrative or aesthetic purposes only and are not intended to convey any instructional, safety, handling or usage information or advice respecting any product or equipment. Please refer to relevant Safety Data Sheets, Product Data Sheets, and/or Product Labels for safe use, storage, handling, and disposal of products, or consult with your local Chesterton sales representative.

© 2019 A.W. Chesterton Company.

® Registered trademark owned by A.W. Chesterton Company in USA and other countries,
unless otherwise noted.